



AK47 pb NS* | SINGLE & DOUBLE HINGED DOOR


FTHE 0043 | Bulletproof AK47pb NS - Kalashnikov with leaded soft core ammunition (in accordance with table A1 of EN1522) - Hinge side attack
 *NS : non splitting

Bulletproof

Tests carried out by the BNE



All Heinen doors are constructed on the basis of the METAL+ concept, lending them superior basic performance standards.

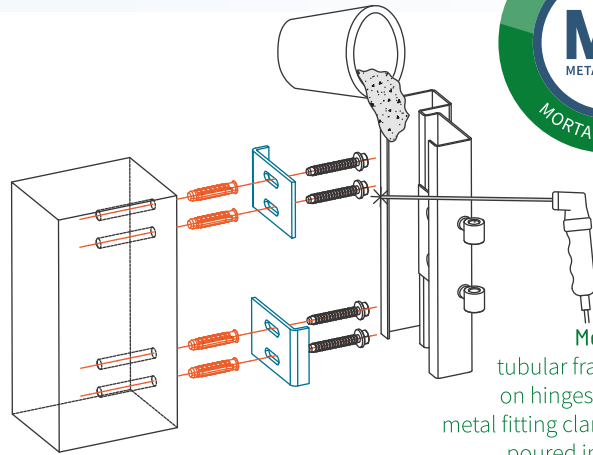

Metal+ construction:
 tubular framework, screwed on hinges and metal sheets, metal fitting clamps to be welded, poured into sealing mortar.

Basic performance features of the AK47pb NS door:



Bulletproof (EN 1522-1523)
 AK47pb NS



Burglary resistance (EN 1627-1630)
 RC4



Acoustic performance
 Basic soundproofing:
 - single door RW = 30dB



Frequency of use
 200,000 open/close cycles







Mechanical resistance
 M4 (max. level)



Service life of the door
 15-year warranty on the door set

Possible combinations: ● Burglary resistant ● Fire resistance ● Anti-panic

CROSS SECTION AK47PB NS DOOR (DRHE 0043)

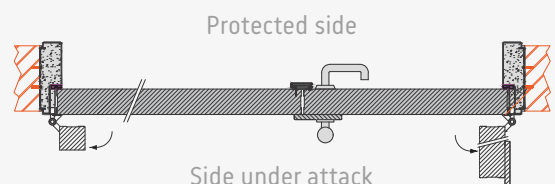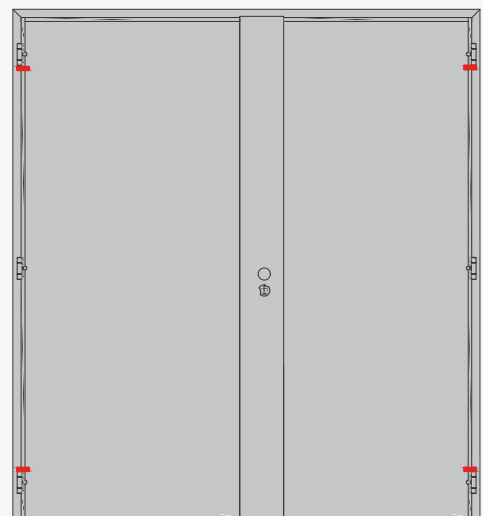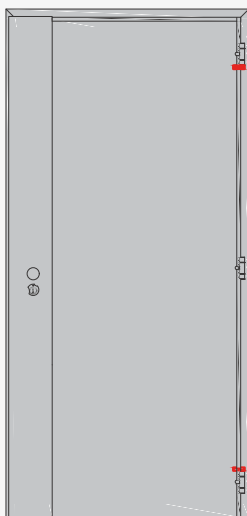

DOOR DIMENSIONS (always customised)

Single door

Maximum dimensions	Width	Height
Leaf	1450	3035
Opening	1560	3113
Minimum dimensions	Width	Height
Leaf	730	600
Opening	840	678

Calculation of clear passage (excluding combinations):

FP 180° = Width of opening - 140
FP 90° = Width of opening - 220
FP = Height of opening - 90

Construction support with a minimum thickness of 140 mm.
On request, larger / smaller doorsets are also available without a certificate, this is also valid for the wall thicknesses.

Double door

Maximum dimensions	Width	Height
Leaf	1450	3035
Opening	3020	3113
Minimum dimensions	Width	Height
Leaf	400	900
Opening	920	978

Calculation of clear passage (excluding combinations):

FP 180° = Width of opening - 140
FP 90° = Width of opening - 290
FP = Height of opening - 90

SECURITY LOCKS


Mechanical systems



- Security (1 and 3 points)
- Anti-panic (3 points)
- Self-Security (1 and 3 points)

- Manual locking
- Automatic locking

Electrical systems with automatic locking



- Overlock (in combination with Self-Security 1 or 3 points).
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit (Fail secure).
- ABLOY EL518, EL520
Controlled entry: Fail secure.
Free anti-panic exit or controlled exit (Fail secure).
- ABLOY EL532
Controlled entry: Fail secure.
Controlled exit: Fail safe.

- Solenoid locks
- Motorised locks



Fail secure: operation by power supply.
Fail safe: operation by power cut.

DETAILS OF MAIN COMBINATIONS



Burglary resistance

Tests carried out by the CNPP.
RC5 (EN1627 to 1630).



Anti-panic

Pushbar or handle.
Cannot be combined with glazing.



Fire resistance

Contact us.






FITTINGS

BASIC FITTINGS

- 1 | **Door frame and leaf finish**
Magnelis® Hot-dip galvanised ZM 250 steel (250g/m², 20µm thick).
- 2 | **Hinges**
Minimum three screwed steel hinges, adjustable and replaceable.
- 3 | **Handles**
A set of two U-shaped aluminium handles.
- 4 | **Europrofil cylinder**
EN 1627 compliant (class 6.2 in accordance with EN 1303).
- 5 | **Backplate**
Stainless steel backplate with round hole + bulletproof backplate.
- 6 | **Security stud system**
2 studs.
- 7 | **Lock**
Security 1 point.
- 8 | **Latch protection system**
a. Hinge side: T.
b. Bulletproof Doorbottom seal.

OPTIONAL FITTINGS

- 1 | **Door frame and leaf finish**
Stainless steel 304, 316 or RAL paint.
- 2 | **Hinges**
One or more hinges can be added; these are always adjustable and replaceable.
Stainless steel.
- 3 | **Handles**
Handles, doorknobs, pull handles etc. In aluminium or stainless steel.
- 9 | **Door closer**
With scissor arm or sliding arm, fitted on the hinge or non-hinge side, with or without closure selectors, open position maintained etc.
- 10 | **Security Locks**
See locks.
- 11 | **Remote surveillance**
Indication of leaf position, locking latch position, indication of leaf status.
- 12 | **Various options**
Soundproof doorsills, door stops, storm chains, impact plates and many other fittings...

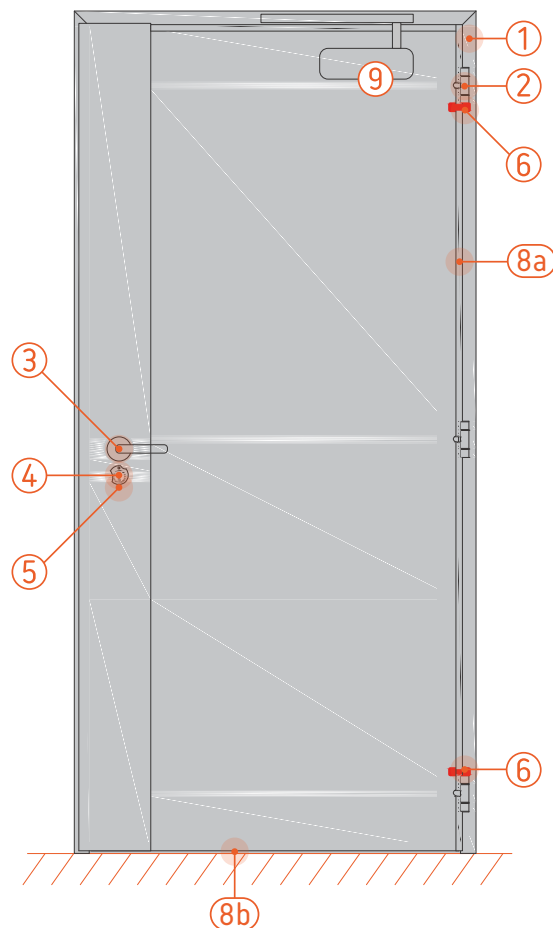

Heinen doors can combine performance features on a bespoke basis. Depending on your needs, one or more performance features are added to the basic, robust Metal+ door. Some performances are only available with the welded and mortar filled installation method.



Fire resistance



Burglary
resistance



Acoustic
performance



Bullet-proof



Blast-proof



Electromagnetic



Anti-panic



Smoke
tightness



Thermal
insulation



Airtightness



Watertightness



Wind
resistance



www.heinen-doors.com

For BIM files, please consult us. Our products are certified **CE**

Heinen product sheet | AK47 pb NS* | SINGLE & DOUBLE HINGED DOOR | 2024-02-27_FT HE 0043 - V11EN

Copyright © Heinen 2024 | Non-contractual document.